



DEPOSITA[®]
An ALLIED UNIVERSAL[™] Company

PROTECTOR
10 000 RANGE

DEPOSITA[®]
An ALLIED UNIVERSAL Company



• SPRT



RELENTLESS PERFORMANCE, UNRELENTING SECURITY

Dealing with high cash volumes comes with high risks. We used all our decades of experience, expertise, and international best practices to develop a range of automated banking machines that cancel out threats - from outside and inside your business.

Our industry-leading, high-speed smart-safes also offer an all-in-one solution to streamline your cash flow. So you can focus on improving your customers' experience and staff performance while saving time and money. Plus, reduce insurance, security, cash-in-transit costs, and more. That's time and money you and your team can devote to your customers and your business.

WE DO MORE THAN PROTECT MONEY.
WE SAVE YOU AND YOUR ENTERPRISE
FROM THE COSTS OF HANDLING CASH.

PROTECTOR 10 000 RANGE

- Biometric, touchscreen, or card user access
- 24-hour on-site device visibility and tamper notification
- Traceable cash containers
- Back-up battery for transaction completion
- Improve cash-in-transit efficiency
- CONNECTOR REPORT — real-time device information, transaction tracking, custom reports, and remote monitoring
- International standard of quality and performance

WE DEVELOP SUPERIOR, INNOVATIVE PRODUCTS THAT OFFER MORE FUNCTIONALITY, MORE EFFICIENCY, AND MORE SECURITY.





MAKE CASH MANAGEMENT MORE INTELLIGENT WITH CONNECTOR

Our comprehensive family of software tools create a powerful, flexible financial transaction platform to suit your business. Improve efficiency and effectiveness of cash management across payment channels and operating systems. Secure, consolidate and make your data easily accessible to decision-makers.

Contact us: deposita.salesadmin@za.g4s.com or +27 (0)11 729 3300



PROTECTOR 10 000 d-s1

DIMENSIONS AND WEIGHT

HEIGHT (validator closed / open)	1 148mm / 1 551mm
WIDTH	725mm
DEPTH	667mm
WEIGHT	211kg

CAPACITY

1 x 10 000 note stackerless bag
10 000 ATM note quality smart-safe capacity

DEPOSIT ACCEPTANCE

1 x note validator that validates notes irrespective of their orientation
600 notes per minute
Infrared and UV note validation
Fraud and dye-stain detection and rejection
200 notes stacked per hopper
100 notes escrow
Remote currency updates

MODULARITY

Optional 25kg coin sidecar

SECURITY


Seismic notification if the device is tampered with

USER INTERFACE

10" Touch screen

ACCESSIBILITY

Mifare card
Touch screen on-device user management

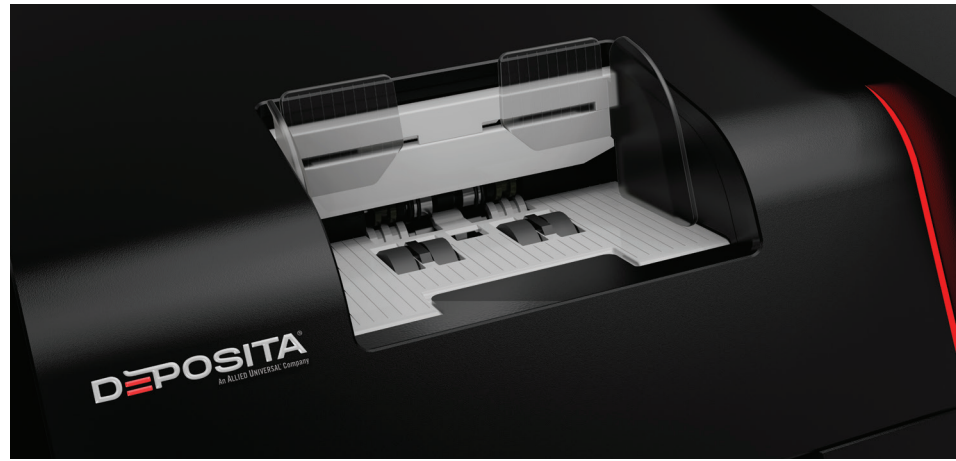

CIT ACCESS

Keyless controlled cash-in-transit entry via device-specific issued and controlled access cards
Front or back clearance for your cash-in-transit service provider

WEB INTERFACE

CONNECTOR REPORT — real-time device information, transaction tracking, custom reports, and remote monitoring

COMMUNICATION

Mobile (GSM) / Local area network (LAN)

PRINTER

SPRT - 384dpi (48mm)

ADDITIONAL OPTIONS

Multi-account banking
Customer point-of-sale integration
Unique reference capture
Failsafe for unverified deposits
Built to Category 3 (CAT3) specifications
Through-the-wall (TTW)
Uninterruptible power supply
Biometric fingerprint verification

POWER CONSUMPTION

AC 110-120V ~ /220-240V ~ 50-60HZ
Idle: 65W
Maximum working: 130W

WORKING ENVIRONMENT

Operating temperature 32°F (0°C) to 104°F (40°C)
Relative humidity: 20% to 95% non-condensing

CERTIFICATION

ISO 9001
ISO 27001
International Electrotechnical Commission (IEC) 60950-1

WARRANTY

Full maintenance plan over the contract period



PROTECTOR 10 000 d-s2

DIMENSIONS AND WEIGHT

HEIGHT (validator closed / open)	1 148mm / 1 652mm
WIDTH	725mm
DEPTH	667mm
WEIGHT	211kg

CAPACITY

1 x 10 000 note stackerless bag
10 000 ATM note quality smart-safe capacity

DEPOSIT ACCEPTANCE

1 x note validator that validates notes irrespective of their orientation
360 notes per minute
Infrared and UV note validation
Fraud and dye-stain detection and rejection
200 notes stacked per hopper
Remote currency updates

MODULARITY

Optional 25kg coin sidecar

SECURITY

Seismic notification if the device is tampered with

USER INTERFACE

10" Touch screen

ACCESSIBILITY

Mifare card
Touch screen on-device user management



CIT ACCESS

Keyless controlled cash-in-transit entry via device-specific issued and controlled access cards
Front or back clearance for your cash-in-transit service provider

WEB INTERFACE

CONNECTOR REPORT — real-time device information, transaction tracking, custom reports, and remote monitoring

COMMUNICATION

Mobile (GSM) / Local area network (LAN)

PRINTER

384dpi thermal printer (48mm)

ADDITIONAL OPTIONS

Multi-account banking
Customer point-of-sale integration
Unique, on-device, reference capture
Built to Category 3 (CAT3) specifications
Through-the-wall (TTW)
Uninterruptible power supply
Biometric fingerprint verification

POWER CONSUMPTION

AC 110-120V ~ /220-240V ~ 50-60HZ
Idle: 65W
Maximum working: 130W

WORKING ENVIRONMENT

Operating temperature 32°F (0°C) to 104°F (40°C)
Relative humidity: 20% to 95% non-condensing

CERTIFICATION

ISO 9001
ISO 27001
International Electrotechnical Commission (IEC) 60950-1

WARRANTY

Full maintenance plan over the contract period



PROTECTOR 10 000 d-s3

DIMENSIONS AND WEIGHT

HEIGHT (validator closed / open)	1 219mm / 1 293mm
WIDTH	464mm
DEPTH	600mm
WEIGHT	235kg

CAPACITY

1 x 10 000 note stackerless bag
10 000 ATM note quality smart-safe capacity

DEPOSIT ACCEPTANCE

1 x note validator that validates notes irrespective of their orientation
720 notes per minute
Infrared and UV note validation
Fraud and dye-stain detection and rejection
400 notes stacked per hopper
200 notes escrow
Remote currency updates

SECURITY

Seismic notification if the device is tampered with
Electronic smart lock with two-factor authentication

USER INTERFACE

9" Touch screen

ACCESSIBILITY

Contactless technology
Touch screen on-device user management



CIT ACCESS

Keyless controlled cash-in-transit entry via device-specific issued and controlled contactless technology accompanied by a one-time pin authentication

Front clearance for your cash-in-transit service provider

WEB INTERFACE

CONNECTOR REPORT — real-time device information, transaction tracking, custom reports, and remote monitoring

COMMUNICATION

Mobile (GSM) / Local area network (LAN)

PRINTER

203dpi thermal printer (58mm)

ADDITIONAL OPTIONS

Multi-account banking
 Customer point-of-sale integration
 Unique, on-device reference capture
 Biometric fingerprint verification
 Uninterruptible power supply

POWER CONSUMPTION

AC 110-120V ~ /220-240V ~ 50-60HZ

Idle: 65W

Maximum working: 130W

WORKING ENVIRONMENT

Operating temperature 32°F (0°C) to 104°F (40°C)

Relative humidity: 20% to 95% non-condensing

CERTIFICATION

ISO 9001

ISO 27001

UL 291

WARRANTY

Full maintenance plan over the contract period



PROTECTOR 10 000 d-s4

DIMENSIONS AND WEIGHT

		Built to Category 3 (CAT3) specifications
HEIGHT (validator closed / open)	1 136mm / 1 186mm	1 181mm / 1 231mm
WIDTH	491mm	524mm
DEPTH	658mm	797mm
WEIGHT	148kg	490kg

CAPACITY

1 x 10 000 note stackerless bag
10 000 ATM note quality smart-safe capacity

DEPOSIT ACCEPTANCE

1 x note validator that validates notes irrespective of their orientation
600 notes per minute
Infrared and UV note validation
Fraud and dye-stain detection and rejection
200 notes stacked per hopper
100 notes escrow
Remote currency updates

MODULARITY

Optional 25kg coin sidecar

SECURITY

Seismic notification if the device is tampered with

USER INTERFACE

10" Touch screen

ACCESSIBILITY

Mifare card
Touch screen on-device user management



CIT ACCESS

Keyless controlled cash-in-transit entry via device-specific issued and controlled access cards
Front or back clearance for your cash-in-transit service provider

WEB INTERFACE

CONNECTOR REPORT — real-time device information, transaction tracking, custom reports, and remote monitoring

COMMUNICATION

Mobile (GSM) / Local area network (LAN)

PRINTER

384dpi thermal printer (48mm)

ADDITIONAL OPTIONS

Multi-account banking
Customer point-of-sale integration
Unique, on-device, reference capture
Failsafe for unverified deposits
Through-the-wall (TTW)
Uninterruptible power supply
Biometric fingerprint verification

POWER CONSUMPTION

AC 110-120V ~ /220-240V ~ 50-60HZ
Idle: 65W
Maximum working: 130W

WORKING ENVIRONMENT

Operating temperature 32°F (0°C) to 104°F (40°C)
Relative humidity: 20% to 95% non-condensing

CERTIFICATION

ISO 9001
ISO 27001
International Electrotechnical Commission (IEC) 60950-1

WARRANTY

Full maintenance plan over the contract period



PROTECTOR 10 000 d-s5

DIMENSIONS AND WEIGHT

HEIGHT	1 190mm
WIDTH	532mm
DEPTH	483mm / 527mm
WEIGHT	179kg

CAPACITY

1 x 10 000 note stackerless bag
10 000 ATM note quality smart-safe capacity

DEPOSIT ACCEPTANCE

2 x note validator that validates notes irrespective of their orientation
40 notes per minute per validator
Infrared note validation
Fraud and dye-stain detection and rejection
40 notes stacked per hopper
Remote currency updates

MODULARITY

Optional 25kg coin sidecar

SECURITY

Seismic notification if the device is tampered with

USER INTERFACE

7" Touch screen

ACCESSIBILITY

Mifare card
Touch screen on-device user management



CIT ACCESS

Keyless controlled cash-in-transit entry via device-specific issued and controlled access cards
Front or back clearance for your cash-in-transit service provider

WEB INTERFACE

CONNECTOR REPORT — real-time device information, transaction tracking, custom reports, and remote monitoring

COMMUNICATION

Mobile (GSM) / Local area network (LAN)

PRINTER

200dpi thermal printer (48mm)

ADDITIONAL OPTIONS

Multi-account banking
Customer point-of-sale integration
Unique, on-device, reference capture
Uninterruptible power supply
Through-the-wall (TTW)
Biometric fingerprint verification

POWER CONSUMPTION

AC 110-120V ~ /220-240V ~ 50-60HZ
Idle: 65W
Maximum working: 130W

WORKING ENVIRONMENT

Operating temperature 32°F (0°C) to 104°F (40°C)
Relative humidity: 20% to 95% non-condensing

CERTIFICATION

ISO 9001
ISO 27001
International Electrotechnical Commission (IEC) 60950-1

WARRANTY

Full maintenance plan over the contract period

DO MORE WITH WHAT'S YOURS™

ISO 27001 & ISO 9001 Accreditation



Customer Service Centre: 0861 000 965 Tel: +27 (0)11 729 3300 deposita.salesadmin@za.g4s.com
1 Slate Avenue. N1 Business Park. Old Pretoria Road. Midrand. Johannesburg. South Africa.

www.deposita.co.za