



DEPOSITA[®]
An ALLIED UNIVERSAL[™] Company

PROTECTOR
2400 RANGE

DEPOSIT
An ALLIED UN

Insert card to start
deposit

SECURE YOUR SUCCESS


Growing your business is already a demanding investment of time and energy. The **Protector 2 400** range will take care of your on-site cash so you can focus on what you need to. This compact, affordable smart-safe automates your cash management saving you precious time. Plus, reduce insurance, security, cash-in-transit costs and more. That's time and money you and your staff can devote to your customers and your business.


AFFORD GREATER SECURITY AND PEACE-OF-MIND
WITH WORLD-LEADING, CASH-HANDLING DEVICES
FOR ANY GROWING BUSINESS.

PROTECTOR 2400 RANGE

- Reduce and streamline cash-in-transit collections
- 24-hour on-site device visibility and tamper notification
- Traceable cash containers
- CONNECTOR REPORT: Track and view transactions and create custom reports via the web
- Back-up battery for transaction completion
- International standard of quality and performance

INNOVATIVE CASH-HANDLING SOLUTIONS
OFFER BETTER SECURITY, FUNCTIONALITY
AND EFFICIENCY.

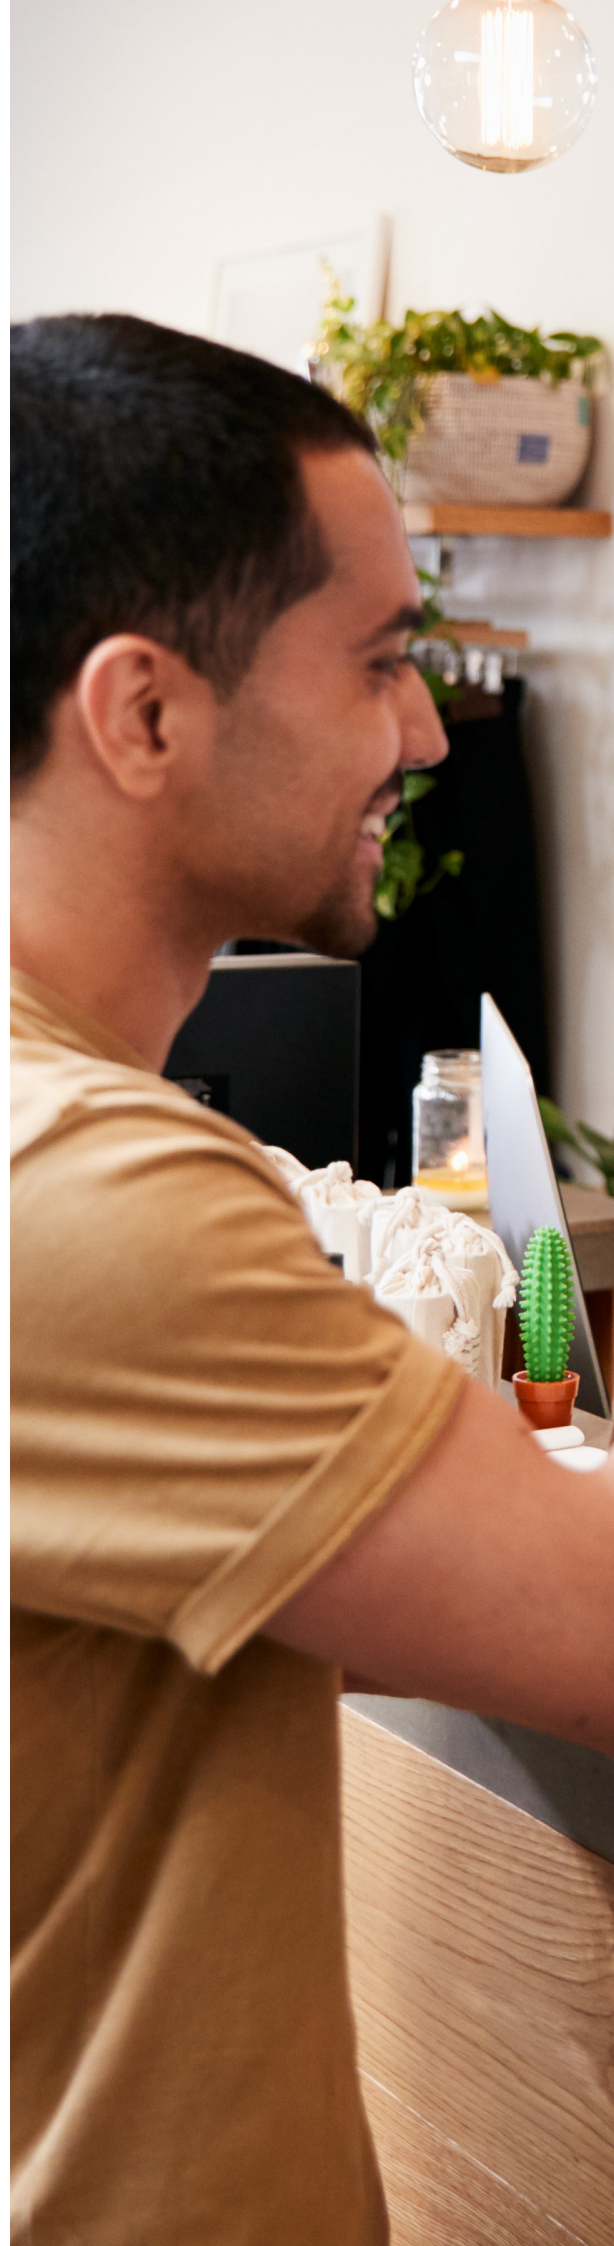

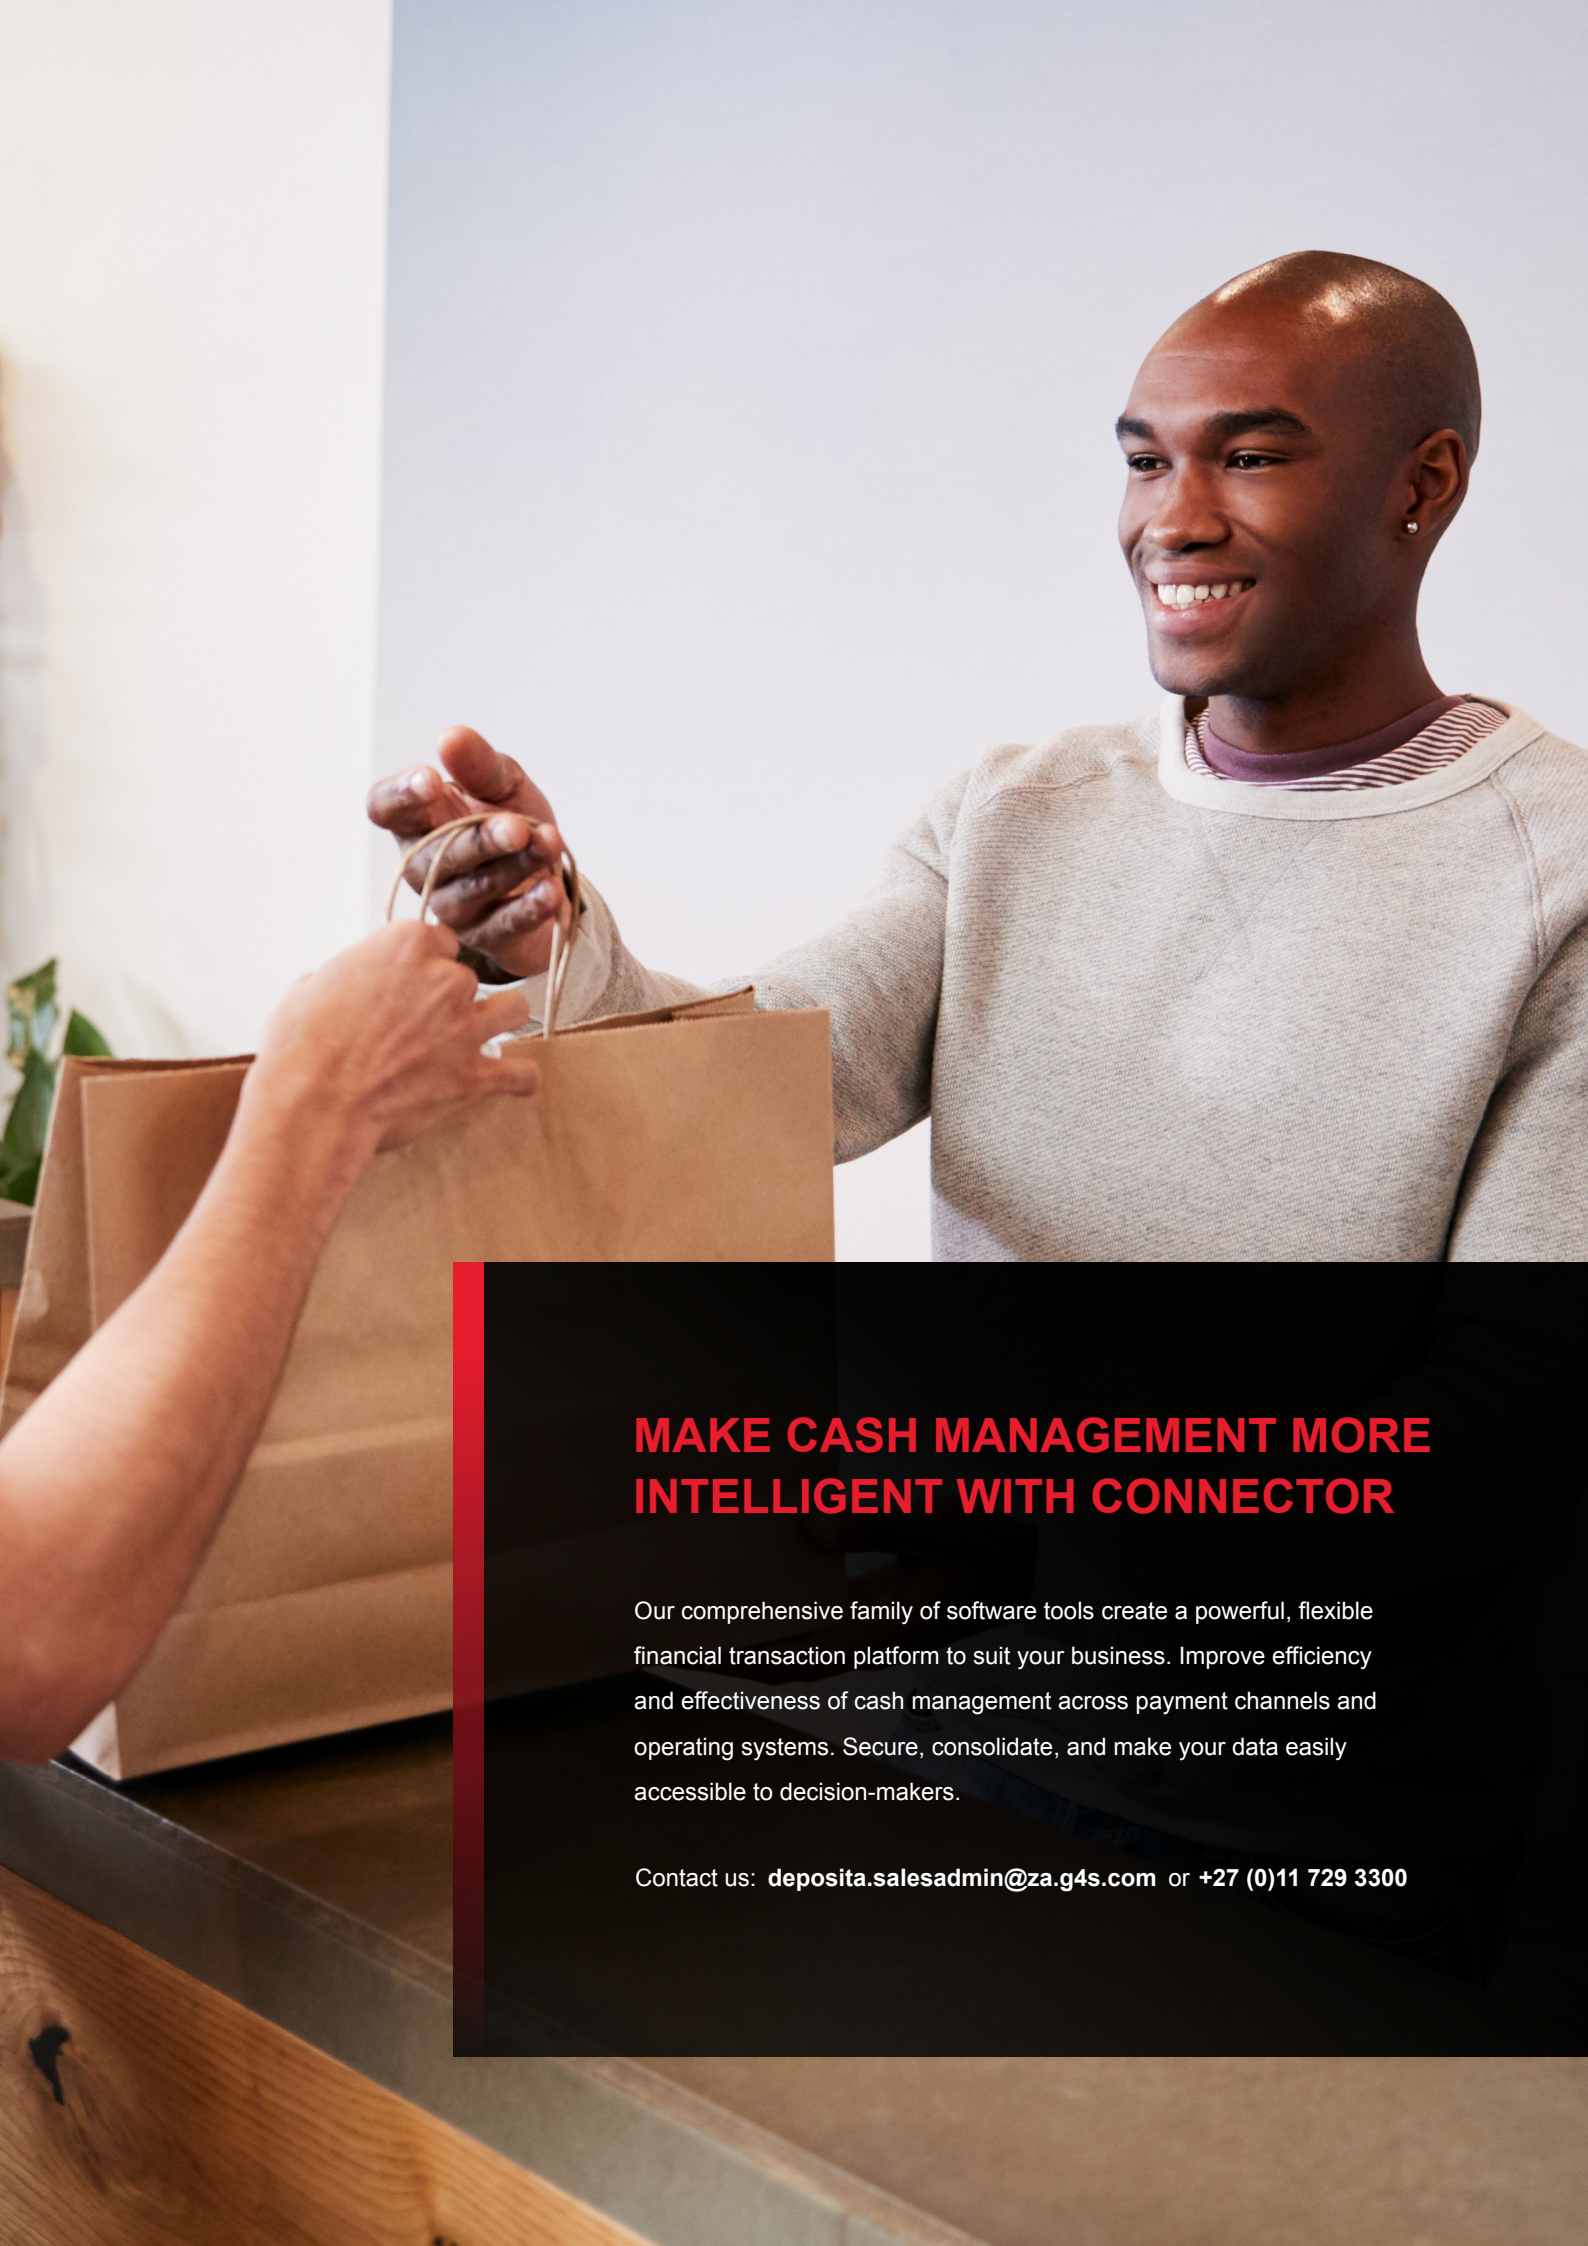

MAKE CASH MANAGEMENT MORE INTELLIGENT WITH CONNECTOR

Our comprehensive family of software tools create a powerful, flexible financial transaction platform to suit your business. Improve efficiency and effectiveness of cash management across payment channels and operating systems. Secure, consolidate, and make your data easily accessible to decision-makers.

Contact us: deposita.salesadmin@za.g4s.com or +27 (0)11 729 3300



PROTECTOR 2 400 d-s1

DIMENSIONS AND WEIGHT

HEIGHT	870mm
WIDTH	441mm
DEPTH	483mm/567mm
WEIGHT	128kg

CAPACITY

2 x 1 200 note stacking canister
2 400 ATM note quality smart-safe capacity

DEPOSIT ACCEPTANCE

2 x note validators validate notes irrespective of their orientation
25 notes per minute per validator
Infrared note validation
Fraud and dye-stain detection and rejection
40 notes stacked per hopper
Remote currency updates

MODULARITY

Optional 25kg coin sidecar

SECURITY

Seismic notification if the device is tampered with

USER INTERFACE

7" Touch screen

ACCESSIBILITY

Mifare card
Touch screen on-device user management



CIT ACCESS	Keyless controlled cash-in-transit entry via device-specific issued and controlled access cards Front clearance for your cash-in-transit service provider
WEB INTERFACE	CONNECTOR REPORT – real-time device information, transaction tracking, custom reports and remote monitoring
COMMUNICATION	Mobile (GSM) / Local Area Network (LAN)
PRINTER	200dpi panel printer (58mm)
ADDITIONAL OPTIONS	Multi-account banking Customer point-of-sale integration Biometric fingerprint verification Plinth (height and storage) Uninterruptible power supply Unique, on-device reference capture
POWER CONSUMPTION	AC 110-120V ~ /220-240V ~ 50-60HZ Idle: 65W Maximum working: 130W Battery back-up for transaction completion
WORKING ENVIRONMENT	Operating temperature 32°F (0°C) to 104°F (40°C) Relative humidity: 20% to 95% non-condensing
CERTIFICATION	ISO 9001 ISO 27001 International Electrotechnical Commission (IEC) 60950-1
WARRANTY	Full maintenance plan over the contract period



PROTECTOR 2400 d-s2

DIMENSIONS AND WEIGHT

	Under-Counter	Through-the-wall (Rear CIT access)
HEIGHT	890mm	1 000mm
WIDTH	516mm	526mm
DEPTH	509mm/527mm	703mm/795mm
WEIGHT	110kg	117kg

CAPACITY

1 x 2 400 note stackerless bag
2 400 ATM note quality note smart-safe capacity

DEPOSIT ACCEPTANCE

1 x note validator that validates notes irrespective of their orientation
40 notes per minute
Infrared note validation
Fraud and dye-stain detection and rejection
40 notes stacked per hopper
Remote currency updates

MODULARITY

Optional 25kg coin sidecar

SECURITY

Seismic notification if the device is tampered with

USER INTERFACE

7" Touch screen

ACCESSIBILITY

Mifare card
Touch screen on-device user management



CIT ACCESS	<p>Keyless controlled cash-in-transit entry via device-specific issued and controlled access cards</p> <p>Front or back clearance for your cash-in-transit service provider</p>
WEB INTERFACE	<p>CONNECTOR REPORT – real-time device information, transaction tracking, custom reports and remote monitoring</p>
COMMUNICATION	<p>Mobile (GSM) / Local Area Network (LAN)</p>
PRINTER	<p>200dpi panel printer (58mm)</p>
ADDITIONAL OPTIONS	<ul style="list-style-type: none"> Multi-account banking Customer point-of-sale integration Biometric fingerprint verification Plinth (height and storage) Uninterruptible power supply Unique, on-device reference capture
POWER CONSUMPTION	<p>AC 110-120V ~ /220-240V ~ 50-60HZ</p> <p>Idle: 65W</p> <p>Maximum working: 130W</p> <p>Battery back-up for transaction completion</p>
WORKING ENVIRONMENT	<p>Operating temperature 32°F (0°C) to 104°F (40°C)</p> <p>Relative humidity: 20% to 95% non-condensing</p>
CERTIFICATION	<p>ISO 9001</p> <p>ISO 27001</p> <p>International Electrotechnical Commission (IEC) 60950-1</p>
WARRANTY	<p>Full maintenance plan over the contract period</p>



PROTECTOR 2400 d-s3

DIMENSIONS AND WEIGHT

HEIGHT	1 040mm
WIDTH	576mm
DEPTH	622mm
WEIGHT	420kg

CAPACITY

1 x 2 400 note stackerless bag
2 400 ATM note quality note smart-safe capacity

DEPOSIT ACCEPTANCE

1 x note validator that validates notes irrespective of their orientation
40 notes per minute
Infrared note validation
Fraud and dye-stain detection and rejection
40 notes stacked per hopper
Remote currency updates

MODULARITY

Optional 25kg coin sidecar

SECURITY

Built to Category 3 (CAT3) specifications
Seismic notification if device is tampered with

USER INTERFACE

7" Touch screen

ACCESSIBILITY

Mifare card
Touch screen on-device user management



CIT ACCESS

Keyless controlled cash-in-transit entry via device-specific issued and controlled access cards
Front or back clearance for your cash-in-transit service provider

WEB INTERFACE

CONNECTOR REPORT – real-time device information, transaction tracking, custom reports and remote monitoring

COMMUNICATION

Mobile (GSM) / Local Area Network (LAN)

PRINTER

200dpi panel printer (58mm)

ADDITIONAL OPTIONS

Multi-account banking
Customer point-of-sale integration
Biometric fingerprint verification
Uninterruptible power supply
Unique, on-device reference capture
Through-the-wall (Rear CIT clearance)

POWER CONSUMPTION

AC 110-120V ~ /220-240V ~ 50-60HZ
Idle: 65W
Maximum working: 130W
Battery back-up for transaction completion

WORKING ENVIRONMENT

Operating temperature 32°F (0°C) to 104°F (40°C)
Relative humidity: 20% to 95% non-condensing

CERTIFICATION

ISO 9001
ISO 27001
International Electrotechnical Commission (IEC) 60950-1

WARRANTY

Full maintenance plan over the contract period

DO MORE WITH WHAT'S YOURS™

ISO 27001 & ISO 9001 Accreditation



Customer Service Centre: 0861 000 965 Tel: +27 (0)11 729 3300 deposita.salesadmin@za.g4s.com
1 Slate Avenue. N1 Business Park. Old Pretoria Road. Midrand. Johannesburg. South Africa.

www.deposita.co.za